optoWare°

B2B Order Entry System

and OrderTracking

developed by OptoWare®

optoVision Gesellschaft für moderne Brillenglastechnik mbH Heinrich-Hertz-Str. 17 63225 Langen/Germany



optoWare[®]

B2B Order Entry System Developed by OptoWare[®]

Discover the most modern technology of B2B Order Entry and Edging System.

	10		Wir	nOnline		*a (1	
New of	rder Order management	Settings Help					
Lens Finesse G Order		Tace Modify Save	Delete				
Spectacle len	nses Individual parame	eters Shape I	racing L	ens calculation			
Refraction		D				Centerir	ig
	e Cylinder Axis A 3,00 2,00 010 3,00 2,00 170	ddition 2,00 1,00 2,00 1,00	260			Right Left	PD Height 32,0 22,0 32,0 22,0
Types Singlevision	Material Index Plastic 1,5 Mineral 1,6	Category OKlassisch OKlassisch	🔿 Sport - Jfe Gold 🔗 Basiclir		Progression Regular Medium	Centerin © Yes © No	g correction beared
Multifocal	□ > 1,0				Short	Prism ce	otration
🔘 Near comfort		C Komfortst				Right Left	Horizontal Vertical 31,9 22,3 31,9 21,7
Product	Right			Left			
Lenstype	I'VISION Org.1.74		Drg.1.74	* ×			
Tint		* X		$_{\odot}$ ×			
AR coating	Smaragd Super	✓ X Smarage		• ×			Order data
	5358 → × ☑ Dev. diam.	CTO 5358 -	× ☑ Dev. diam.	СТО			Commission
	Balancing	Ellipse	Balancing	Ellipse			Comment

Your advantages:

- Supported order types: Lens, Frame, Specs, Bundles of frames and lenses
- Completely relies on industry standard SF6 (product catalog) and B2BOptic (XML order format)
- Tracer compatibility to Nidek, Weko, Essilor, Hoya, National Optronics, Briot, Takubomatic, INDO/Schöne, Topcon.
- > Features eg. product filters are customizable to your needs
- Online calculation if the OptoWare RX Lab software is running
- Multilingual support (German, English, French and Dutch). If there is a need of other languages, OW can support the translation with a tool which will be provided to the customer.

The list of the devices presently supported by OptoWare can be found on the last page.





Shape tracing Edging Data and Glazing Data

Take over or/and edit the centering data from lens / order entry.

Trace the shape.

Choose the frame and shape data from a database.

Accommodate you edging data.

Tag the drill holes inside of Shape.

	-	WinOnline
New order Order management Settings	Help	
Lens Finesse Glazing Order type	Save Delete shape	
Spectacle lenses Individual parameters	Shape tracing	Lens calculation
Centering PD Height DBL	Frame	Groove
Right 32,0 16,0 19,0	Material	Rimless vidth 0,6
Left 32,0 16,0 19,0	Bevel	Grooved & Polished - Depth 0,4
	Brand	MyBrand
	Model	1211
Glazing	Colour	A
	Size	50,0 / 27,4
DM 58 DecX -2,5 Circumference 130,5 DecY 2,3		DM 58 DecX -2,5 Circumference 130,5 DecY 2,3
R - 27,44 mm - +	-19,0->	

Lens calculation and calculation consulting printout

Use the form data to calculate the lens thickness, for thickness optimization and consultancy purposes. Allow to compare two different lenses / lens types and to show the deviations between them. Also it is possible to show the thickness of lenses on every position inside of shape or inside of original lens diameter. Print your consultancy purposes or / and create a PDF-file

	-			Wii	nOnline			a 1		
New o	order Orde	er management Setting:	s Help							
ens Finesse (Order	Slazing Spectac	les Shapes Trace Modifi Frames / Shapes		lete						
Spectacle lei	nses 1	Individual parameters	Shape tracin	ia L	ens calculation	n				
	ens type		Compare to		м	1aterial				
Product	I'VISION Org.1.7	SION Org.1.74		.74	 Plastic 					
Diameter	5358 - ×	5358 - X	5358 - ×	5358 + ×						
	✓ Dev. diam.	Dev. diam.	V Dev. diam.	V Dev. diam.	¢.) Mineral				
		СТО	СТО	Сто						
	Right	Left	Right	Left						
Cent. thkn.	4,1 mm	Leπ 3,5mm	3,6 mm	Leπ 3,0 mm	Deviations	s to origina	llens			
Min. edge thkn.	2,0 mm	1,6 mm	1,5 mm	1,1 mm	Denations	Right	1010-10-20	Left		
- Max. edge thkn.	3,4 mm	2,7 mm	3,0 mm	2,3 mm	Cent. thkn.		-14 %	-0,5 mm	-16 %	
Base curve	5,50 dpt	5,50 dpt	5,50 dpt	5,50 dpt	Edge, thkn.	-0,5 mm	-17 %	-0,5 mm	-21 %	
Weight lens	6,95 g	5,64 g	5,96 g	4,67 g	Weight	-1,0 g	-17 %	-1,0 g	-21 %	
Weight frame (pl	ease enter)	0,00 g			Weight sper	cs	-2,0 g			
	R - 32,20 mm	50,00 mm			Re					Print
				6		7				Cut / Front Calculate


optoVision[®]

optoVision Gesellschaft für moderne Brillenglastechnik mbH Heinrich-Hertz-Str. 17 63225 Langen/Germany



Spectacles data

Allow to manage standard frames and stock frames as well as the form database.

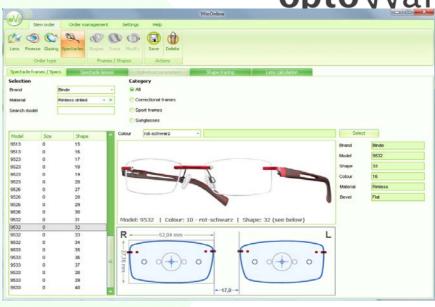


Order Management/ OrderTracking and searching for open orders

Manage all orders in an overview.

Check the state of order

Search the orders for different attributes.

Check the order and shape data.

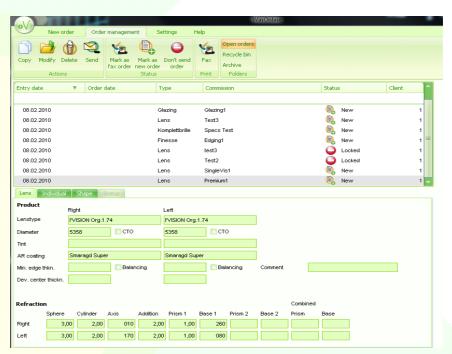

List of the devices presently supported

Tracers

Weco Trace II Weco Trace III Weco FormTracer 3-D plus Briot Scanform net Briot Scanform net 2 Briot Accura Cx Nidek RD 100 (projected) LT700 Nidek Nidek LT900 Nidek LE-7070SX Nidek LE-9000 SX National Optronic 4TI (OMA) National Optronic Dimension

optoVision Gesellschaft für moderne Brillenglastechnik mbH Heinrich-Hertz-Str. 17 63225 Langen/Germany Essilor Phi Essilor Kappa (OMA) Essilor Kappa (ESL3D) Essilor Tess Essilor eTess Hoya GT 1000 Hoya GT 3000 (HOYA3D) Hoya GT 3000 (OMA) Hoya UT 1000 INDO/Schöne 3D Teleform INDO/Schöne 3D Combimax Topcon FR-50 Takubomatic

